

## CYB-K2811

### Erişim Kontrol Sistemi




CYB-K2811 access controller is designed with latest structure with TCP/IP communication interface. The communication data is encrypted to improve the security of system. The controller also supports offline operation and is designed with tamper-proof switch.

- Supports one door access control Supports anti-passback function, multi-card function, first person function, super card and super password function
- Supports alarm event upload Supports RS-485 interface and Wiegand interface for accessing card reader. Wiegand interface supports W26/W34
- and is seamlessly compatible with third-party card reader with Wiegand interface
- Supports standby battery Data can be saved when the access controller is powered off

## □ Specification

<b>Network</b>	Wired	
network	<b>Interface</b>	10 M/100 M self adaptive
Network	interface	
Lock	control	Exit
button	Door	contact
input	Alarm	input
Alarm output	TAMPER	
RS-485	Wiegand	
<b>Capacity</b>	Card capacity	4
Event	capacity	1
<b>Function</b>	Anti-	1
passback	<b>General</b>	2, Wiegand 26/34
Power supply	Battery	
Power consumption		10,000
		50,000
Working temperature		
Working humidity		Support
Dimensions		
		100 to 240 VAC
		Backup battery connection available
		With load: ≤ 100 w
		Without load: ≤ 4 w
		-20 °C to 65 °C (-4 °F to 149 °F)
		10% to 90% (no condensing)
		370 mm × 345 mm × 90 mm (14.6" × 13.6" × 3.5")

## □ Typical Application

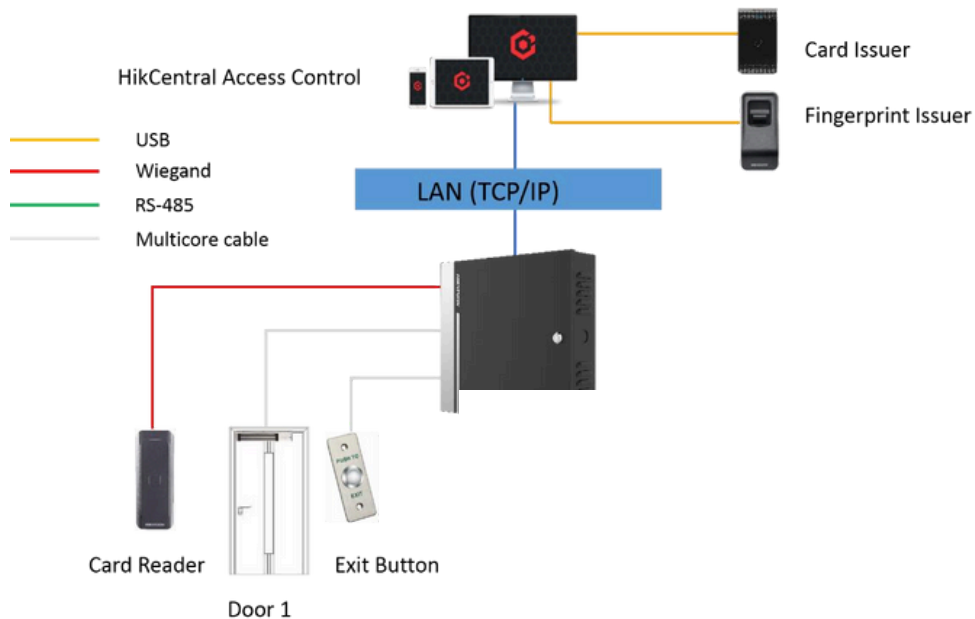

## Available Model

CYB-K2811

## Dimension

