




CYB B1200 Series

CYB B1200 Dual-lane Swing Barrier Turnstile

CYB B1211 Dual-lane Swing Barrier Turnstile
(w/ controller and RFID reader)

CYB B1222 Dual-lane Swing Barrier Turnstile
(w/ controller and fingerprint & RFID readers)

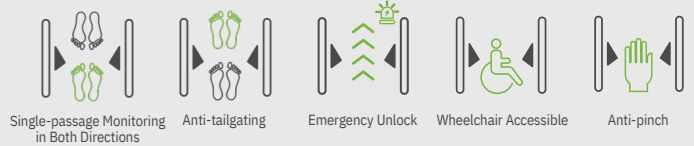

Highly Durable and Low Maintenance Costs

- Modularized structure design
- Exposed mounting holes for easy installation
- Mainly made of SUS304 stainless steel

PGIC Controller

- Equipped with a PGIC controller
- Access control
- General features and parameters settings on the controller's menu

LED Indicator

- Visual cues for correct walking direction
- Clear guidance with green and red illustration

Switchable Reader Panel

- Six panels available:
 - RFID only
 - RFID & Fingerprint
 - RFID & QR Code
 - RFID & Fingerprint & QR Code
 - RFID & Card Slot
 - RFID & Card Slot & QR Code
- Reducing middlemen's inventory pressure
- Reducing installation time & expenses

Installation Place for Facial Recognition A&C Terminals

- Diameter: 34mm
- Integration with Facial Recognition, Temperature and Mask Detection Terminals

Infrared Sensors


- 6 pairs of infrared sensors for stronger tailgating detection
- Maximum 12 pairs of sensors could be installed



Specifications

Model	CYB B1200 Series
Power Requirements	AC100V to 120V / 200V to 240V, 50 to 60Hz 55W;
Working Power	22W (stand-by) Brushless Motor 3 millions Up to 25
Drive Unit	people per minute Swing
MCBF	<60dB
Technical Throughput Rate	6 pairs (option: ≤12 pairs)
Barrier Movement	Support t
Noise	-25°C to 65°C
Infrared Sensor	20% to 95% (non-condensing)
LED Indicator	Indoor / Outdoor (if sheltered)
Working Temperature	650mm(optional≤900mm)
Working Humidity	1360 * 180 * 1010 (mm) (±5mm)
Working Environment	1510 * 365 * 1216 (mm)
Lane Width	61kg (±5kg)
Dimensions (L*W*H)	86kg (±5kg)
Dimensions with Packaging (L*W*H)	SUS304 stainless steel (option: SUS316 stainless
Net Weight	steel)
Gross Weight	SUS304 stainless steel
Cabinet Material	
Lid Material	
Barrier Material	
Packing Material	Arcylic(optional: SUS304 stainless steel or Tempered Glass)
Protection Level	Wooden case
Warranty	IP34
	1 year

Applications



Airports




Stations




Gyms



Government Buildings



Hotels



Banks

Dimensions (mm)

