


Speci cations

Model	CYB S1000 Series
Power Requirements	AC100V to 120V / 200V to 240V, 50 to
Working Power	60Hz 70W; 20W (stand-by) Servo Motor 10
Drive Unit	millions Up to 30 people per minute Swing
MCBF	<60dB
Technical Throughput Rate	16 pairs
Barrier Movement	Suppor t
Noise	-25°C to 65°C
Infrared Sensor	20% to 95% (non-condensing)
LED Indicator	Indoor / Outdoor (if sheltered)
Working Temperature	650mm(optional≤900mm)
Working Humidity	1360 * 120 * 1020 (mm) (±5mm)
Working Environment	1510 * 365 * 1216 (mm)
Lane Width	(2 boxes) 110kg (±5kg)
Dimensions (L*W*H)	160kg (±5kg)
	SPCC (option: SUS316 stainless steel)
Dimensions with Packaging (L*W*H)	SPCC (option: SUS316 stainless steel)
Net Weight	Arcylic(optional: Tempered Glass)
Gross Weight	Wooden case
Cabinet Material	IP34
Lid Material	
Barrier Material	
Packing Material	
Protection Level	
Warrantry	5 years

Applications

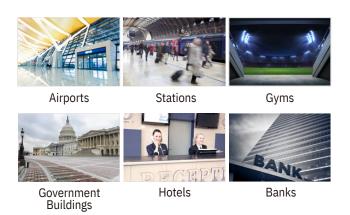

Dimensions (mm)

