

## DS-K5671-ZV Face Recognition Terminal



The face recognition terminal adopts deep learning algorithm, which helps to recognize the face faster and more accurate. It also supports multiple authentication modes: 1:N face match, etc. When installed on the turnstile, it can be applied in multiple scenarios, such as buildings, businesses, financial industries, and other important areas.

- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- Face mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance is valid
- Face recognition terminal for turnstile
- Built-in IO output or Wiegand output to communicate with the third-party turnstile
- 7 inch LCD Touch Screen, 2 M camera
- Max. 50,000 faces, and Max. 100,000 events
- Face recognition distance: 0.3 m to 3 m; Face recognition duration < 0.2 s/User; Accuracy rate ≥ 99%
- TCP/IP, Wi-Fi communication
- Remote live view via RTSP protocol
- IP65


## ▪ Specification

| <b>Display</b>       |  |
|----------------------|--|
| Screen size          | 7 inch   |
| Operation method     | Capacitive touch screen  |
| Type                 | LCD  |
| <b>Video</b>         |  |
| Lens                 | 2  |
| Resolution           | 2 MP   |
| FOV                  | HFOV = 87°; VFOV = 46°   |
| <b>Network</b>       |  |
| Wired network        | Support  |
| Wi-Fi                | Support, 2.4 G, 802.11b/g/n  |
| <b>Interface</b>     |  |
| Network interface    | 1 RJ-45, 10/100/1000 M self-adaptive   |
| Lock control         | 1  |
| Door contact input   | 1  |
| Alarm input          | 2  |
| Alarm output         | 1  |
| RS-485               | 1 RS-485 (Half duplex, HIKVISION)  |
| Wiegand              | 1 Wiegand(Hik 26bit,Hik 34bit)   |
| USB                  | 1  |
| <b>General</b>       |  |
| Power supply         | 12 VDC, 2 A  |
| Working temperature  | -30 °C to 60 °C (-22 °F to 140 °F)   |
| Working humidity     | 10 to 90% (no condensing)  |
| Language             | English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil) |
| Platform             | Hik-ProConnect and HikCentral Professional   |
| <b>Function</b>      |  |
| QR code recognition  | Support. The dimension of the recognized QR code picture should be larger than 6 cm × 6 cm.          |
| Audio prompt         |  |
| Time synchronization |  |

## ▪ Available Model

DS-K5671-ZV

▪ Dimension

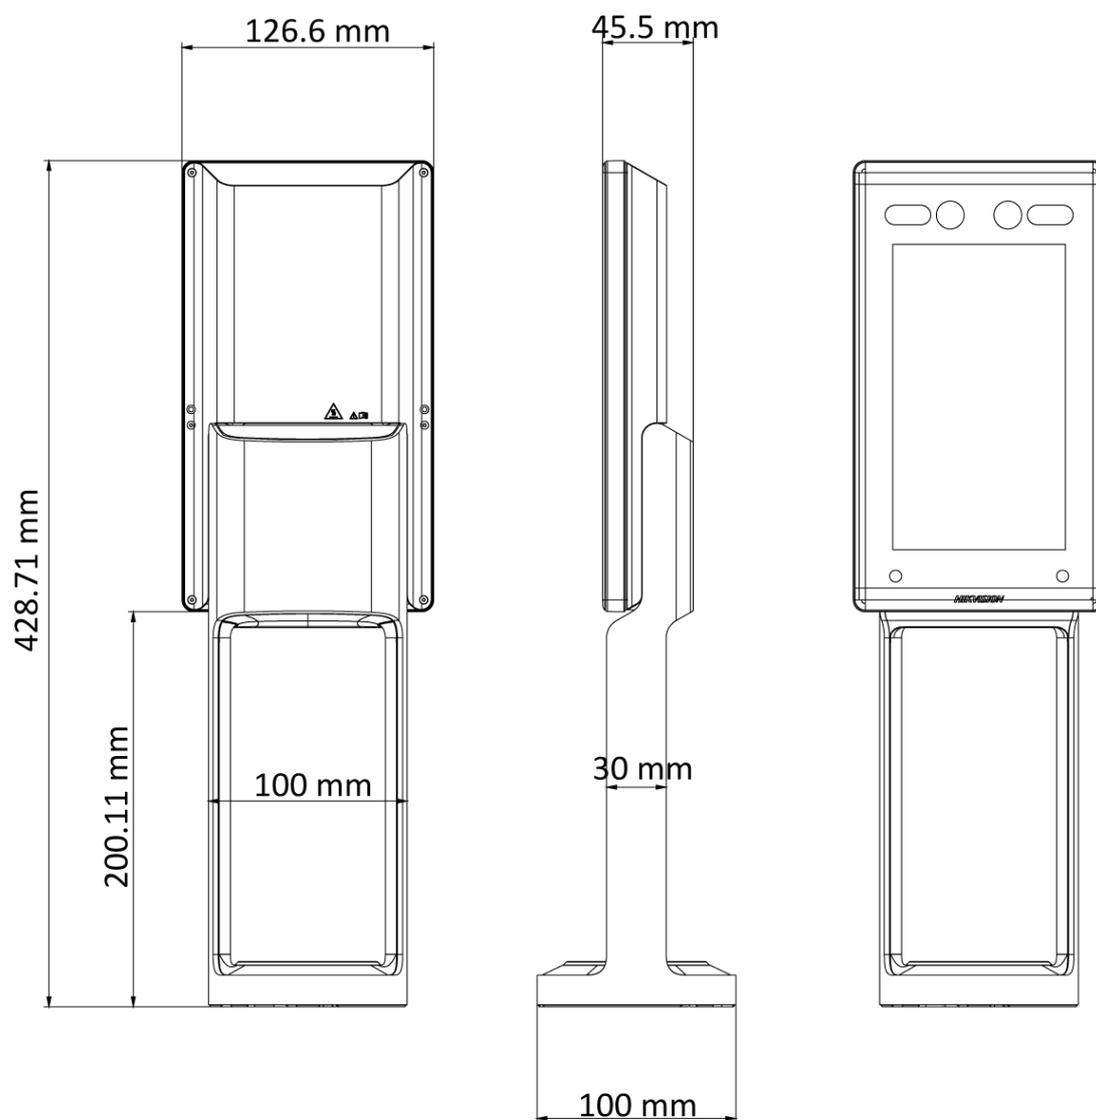

▪ **Accessory**

▪ **Optional**

| <b>DS-K3B601A</b><br><b>Pro Swing Barrier</b><br><b>Plus</b>                       | <b>DS-K3B601</b><br><b>Pro Swing Barrier</b>                                       | <b>DS-K3B801</b><br><b>Ultra Swing Barriers</b>                                   | <b>DS-K3B801A</b><br><b>Ultra Swing Barriers</b>                                   | <b>DS-K3G401</b><br><b>Pro Series Tripod</b><br><b>Turnstile</b> |
|--|--|---|--|--|
|   |   |  |  |  |
| <b>DS-KAB5671-S</b><br><b>Protective Shield</b>                                    | <b>DS-K3B801#CD</b><br><b>Ultra Swing Barriers</b>                                 |   |  |  |
|  |  |   |  |  |

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

